Radiation dose assessment for radiation workers during 18F-FDG synthesis and dispensing activities in hot cells: a proposal to improve the safety of radiation protection measures for workers

S.T. Kim¹, J. Kim^{2,3,4}, J.M. Park^{2,3,4,5*}

¹Nuclear Emergency Division, Radiation Protection and Emergency Preparedness Bureau, Nuclear Safety and Security Commission, Seoul, Republic of Korea

²Department of Radiation Oncology, Seoul National University Hospital, Seoul, Republic of Korea

³Institute of Radiation Medicine, Seoul National University Medical Research Center, Seoul, Republic of Korea

⁴Biomedical Research Institute, Seoul National University Hospital, Seoul, Republic of Korea

⁵Institute for Smart System, Robotics Research Laboratory for Extreme Environments, Advanced Institutes of
Convergence Technology, Suwon, Republic of Korea

ABSTRACT

Background: Hot cells are used in the production of radiopharmaceuticals to provide radiation workers with a safe environment in which to work. This study was conducted to measure the radiation dose that leaks through the walls of a hot cell. Materials and Methods: For this study, hot cells of five big hospitals (≥ 1000 beds) in South Korea were selected. To calculate the radiation exposure outside the walls of the hot cell (i.e., the external dose) during fluorine-18 fluorodeoxyglucose (18F-FDG) synthesis and dispensing activities, exposure rates were measured with a Geiger Muller counter (GM counter) at five locations around the hot cells (10 measurements per each measurement point). Based on the measurements, operating conditions of the hot cells of the five hospitals were conservatively considered to calculate the effective dose. The radiation exposure inside the hot cell (i.e., the internal dose) was estimated considering the operating conditions of the hot cells of five large hospitals as well as international guidelines. Results: The Based on the experimental results, the impact of the internal dose was found to be negligibly low during ¹⁸F-FDG synthesis and dispensing activities (less than 0.21 mSv/y); however, the radiation leakage exhibited levels requiring caution in all directions, with a radiation leakage of up to 19.5 µSv/h measured on the lead glass windows of the hot cells in some hospitals. Conclusion: The conclusion is that radioisotope manufacturers operating radiopharmaceutical synthesis and dispensing hot cells should implement various improvements. Strengthening the shielding of the lead glass windows on the front and sides of cells, implementing real-time dosimetric monitoring, setting dose limits for radiopharmaceutical production processes, and regular worker rotations are needed.

▶ Original article

*Corresponding authors:

Jong Min Park, PhD., Fax: + 82 2765 3317 E-mail:

leodavinci@naver.com

Revised: January 2019 **Accepted:** March 2019

Int. J. Radiat. Res., October 2019; 17(4): 587-593

DOI: 10.18869/acadpub.ijrr.17.3.587

Keywords: 18 F-FDG, hot cell, radiation worker, external dose, internal dose.

INTRODUCTION

Positron emission tomography (PET) is widely used in nuclear medicine imaging, and has become increasingly popular because it allows not only the three-dimensional observation of bodily organs, but also facilitates the evaluation of physiological (functional) metabolisms within tissues in the body. Fluorine -18 fluorodeoxyglucose (18F-FDG) is the

Kim et al. / Dose to radiation worker during 18 F-FDG synthesis

radiopharmaceutical most commonly used for PET imaging (1). The basic principle of PET imaging is as follows. When a positron (i.e., an antiparticle to an electron) within an atom is ejected from the nucleus, it bonds with an electron. This positron-electron annihilated, thereby emitting two gamma rays with equal energies of 0.511 MeV in opposite directions (i.e., 180 degrees apart from each other). By employing radioisotopes capable of emitting positrons, the corresponding 0.511 MeV gamma ray energy that is emitted in opposite directions can be measured via a circularly arranged detector centered on the location where the positron-electron annihilation occurred, and the target organ and lesion can be visualized in the resulting radionuclide image (2). Radioisotopes (radionuclides) such as C-11, N-13, O-15, and F-18 are used to obtain PET tracers for imaging. Among these, F-18 is the one most commonly used in PET imaging as its half-life (110 min) is useful in clinical applications and its energy can easily be detected.

Synthesis is the process of incorporating deoxyglucose into F-18, after which synthesized radioactive isotopes are transferred to a separate dispensing module. Because the work area is exposed to high dose rate radiation during this operation, it is performed in a heavily sealed space called a hot cell, which is shielded by a lead housing of specified thickness and equipped with an air exhaust and a triple filtration system. In other words, a hot cell is a chamber that isolates the radiation source from the outside environment to minimize the exposure of workers to ionizing radiation. Given that the synthesis and dispensing modules usually contain radionuclides amounting to hundreds of GBq during ¹⁸F-FDG synthesis, the walls of hot cells have thick lead shielding (~100 mm) in all directions that is designed to prevent the escape of radiation from the hot cell.

The purpose of this study is to assess the safety of hot cell radiation shields by measuring the radiation released from the inside to the outside of a hot cell during ¹⁸F-FDG synthesis and dispensing activities, and to determine the proportions of external and internal exposures

relative to the total radiation exposure by calculating the internal dose while taking into account the operating conditions, such as the maximum daily production, expected daily dispersion rate, and annual consumption ¹⁸F-FDG. Few studies have been conducted on the radiation exposure caused by the radiation released to the outside of a hot cell (hereinafter referred to as the "external dose") and the radiation exposure caused by radionuclides dispersing within a hot cell (hereinafter called the "internal dose") during ¹⁸F-FDG synthesis. Although such a radiation assessment is essential when setting up or improving radiation protection plans for radiation workers, no study has been performed for the big hospitals in South Korea vet. Therefore, we performed the radiation assessment for the hot cells by utilizing data from the five big hospitals in South Korea in this study. The results can be used as a strong rationale for the need to strengthen radiation protection measures in relation to radiopharmaceutical production comprehensive manner while taking into account the current operations and management system and the shielding facilities.

MATERIALS AND METHODS

The external and internal doses for radiation workers involved in $^{18}\text{F-FDG}$ synthesis and dispensing activities in the hot cells of five large hospitals (≥ 1000 beds) in a major city in South Korea were assessed based on the maximum daily production of $^{18}\text{F-FDG}$.

Maximum daily production of ¹⁸F-FDG by hospital

The maximum daily production of F-18 of Hospital A, B, C, D, and E were 494 GBq. 814 GBq, 185 GBq, 296 GBp, and 370 GBp, respectively.

Sizes and specifications of the evaluated hot cells

The ¹⁸F-FDG synthesis device in a hot cell can be observed through a lead glass window in the front shield, and is customized in terms of its

Int. J. Radiat. Res., Vol. 17 No. 4, October 2019

size and specifications to the production characteristics of each hospital, as shown in table 1. If a hospital operates multiple hot cells for ¹⁸F-FDG production, the one with the highest daily production rate was selected for assessment in this study.

Radiation dose measurement External dose

Radiation workers usually face the front of the hot cell during radiopharmaceutical synthesis and dispensing activities because the hot cells themselves are mounted along the wall. However, in this study, radiation doses were also measured in the rooms adjacent to the hot cell room (e.g., the upstairs floor and the walls to the sides and rear of the hot cell) in order to determine the level of radiation in adjacent rooms used by non-radiation workers, such as machine rooms, waste storage rooms, and storerooms.

Doses were measured during ¹⁸F-FDG activities synthesis and dispensing measurement points located at the center of the lead glass window in the front opening, and at points on the front, sides, rear, and top of the shielding walls on their respective extended lines from the ¹⁸F-FDG synthesis and dispensing devices. A total of ten measurements were made at 5-min intervals at each of the positions shown in figure 1. The bottom part was excluded from dose measurement because the hot cells were located on the bottom-most floor in all five hospitals investigated. When calculating the expected effective dose p.a. received by radiation worker based on the dose assessment results, the total number of operating hours was set based on two hours a day, five days a week, and 50 weeks per year.

The radiation detector used to measure the external dose was a GM counter (RadEye B20, Thermo Scientific, Germany) that had been calibrated by a laboratory that specializes in the field that was certified by the Korea Laboratory Accreditation Scheme (KOLAS) and accredited by the International Laboratory Accreditation Cooperation.

Internal dose

In this study, the internal doses were not Int. J. Radiat. Res., Vol. 17 No. 4, October 2019

directly measured with the whole body counter or samples such as blood and urine, but estimated by calculations using factors of the working environment in order to evaluate internal exposure of workers conservatively.

In this study, only the internal dose of F-18 was measured because it is the most commonly radionuclide cvclotron-based used in radiopharmaceutical production facilities and is the radionuclide with the longest half-life (110 min). As a liquid-state radionuclide with chemical properties similar to those of I-131, F-18 is classified into Group 2 of the classification in table 2 proposed by Takada et al. (3), which is used by nuclear operators and nuclear safety commissions in radiation protection inspection plans for unsealed radiation sources. The table 2 presents the dispersion rate and correction factors necessary for estimating the internal radiation dose depending on the method of manipulating unsealed radiation sources and the dispersion which varies depending radionuclide, physical state, and manipulation method. The table 2 was used for calculating the maximum atmospheric dispersion rate in the hot cell room, the maximum expected atmospheric concentration, and the expected internal dose.

Given the fact that ¹⁸F-FDG synthesis is performed in an automated synthesis module within a hot cell equipped with an air exhaust system and a triple filtration system (pre-filter, HEPA filter, and charcoal (carbon) filter) designed to provide isolation and negative pressure, the leakage of contaminated air from inside the hot cell is precluded. Moreover, all chemical reactions throughout the synthesis process, including the heating and evaporation steps, occur in reactor vials. The possibility of dispersion can also be precluded because the reactor vial is sealed and its state is inspected via leakage or pressure checks during the calibration prior to each operation of the automated synthesis module. Accordingly, the dispersion rate was calculated assuming common manipulation (×1) for the exhaust test, and assuming the following synthesis and dispensing work conditions for the internal dose measurement. The average air intake of a

Kim et al. / Dose to radiation worker during 18 F-FDG synthesis

radiation worker was set at 1.1 m³/h, as specified in the International Commission on Radiological Protection (ICRP) 103 ⁽⁴⁾.

- 1) Total number of operating hours: 2 h/day = 10 h/week = 500 h/year
- 2) Average air intake of a radiation worker: 1.1 m³/h
- 3) Hot cell exhaust air: 100 m³/h
- 4) Proportion of F-18 diffused into the hot cell from the vials and the synthesis module: 1%

Internal doses in the working conditions described above were measured using Eqs. (1)–(5) together with the dose conversion factor 9.3 \times 10⁻¹¹ Sv/Bg specified in ICRP 68 (5).

Expected dispersion rate = 10^{-4} (Group 2) × 1 (liquid) × 1 (common manipulation) (1)

Indoor dispersion rate (Bq/day) = Max. production $(Bq/day) \times 10^{-4}$ (expected dispersion rate) $\times 0.1$ (indoor spread rate) (2)

Average atmospheric concentration (Bq/m³) = Expected indoor dispersion rate

Annual intake (Bq/y) = Average atmospheric concentration \times 500 h \times 1.1 m³/h (average air intake for an adult) (4)

Expected internal dose = Annual intake × Dose conversion factor (5)

Table 1. Specifications of the hot cell shielding by hospital.

Hospital			Size (mm)	Shielding		
Hospital			(all sizes in $W \times L \times H$)	All side wall	Lead glass window	
Α	Synthesis	Outside	2450 × 1190 × 2500	75 mm Pb	75 mm PbEq	
		Inside	$1000 \times 850 \times 900$	73 111111 FD		
	Dispensing	Outside	2480 × 1140 × 2400	60 mm Pb	60 mm PbEq	
		Inside	1050 × 850 × 900	00 111111 PD		
	Synthesis	Outside	1310 × 1190 × 2500	75 mm Pb	75 mm PbEq	
В		Inside	970 × 875 × 870	73 111111 FD		
В	Dispensing	Outside	1650 × 1166 × 2400	75 mm Pb	75 mm PbEq	
		Inside	880 × 700 × 700	73 111111 FD	73 IIIIII PDEQ	
	Synthesis	Outside	1080 × 1251 × 2300	100 mm Pb	60 mm PbEq	
С		Inside	700 × 700 × 700	100 111111 PD		
	Dispensing	Outside	1330 × 1287 × 2300	75 mm Pb	60 mm PbEg	
		Inside	700 × 700 × 650	73 111111 FD	ou min PDEq	
	Synthesis	Outside	2140 × 1190 × 2500	75 mm Pb	60 mm PbEq	
D		Inside	850 × 875 × 870	73 111111 FD		
	Dispensing	Outside	1540 × 1490 × 3030	75 mm Pb	75 mm PbEq	
		Inside	1280 × 930 × 1160	73 111111 FD		
E	Synthesis	Outside	1040 × 1170 × 2480	75 mm Pb	75 mm PbEq	
		Inside	720 × 710 × 635	75 111111 FU		
-	Dispensing	Outside	1270 × 1220 × 2680	75 mm Pb	75 mm PbEg	
		Inside	920 × 820 × 670	73 111111 FU	, 5 mm r brd	

Table 2. Dispersion rates and correction factors depending on the radionuclide and manipulation method.

Radionuclide		Dispersion rate/day	Physical state	Correction factor	Manipulation method	Correction factor
Group 1	H-3, C-14, S-35, Se-75	10 ⁻³	powder	× 10	Heating	× 100
Group 2	As-77, Ru-103, Sb-125, I-123, I-125, I-131, Cs-137, Hg-197	10 ⁻⁴	Liquid	×1	Chemical reaction, Machining, Animal testing	× 10
	Na-22, Na-24, P-32, Ca-45, Cr-51,	7			Usual manipulation	× 1
Group 3	Fe-59, Ga-67, Mo-99/Tc-99m, In-111, Pm-147, Au-198, Tl-201	10 ⁻⁷	Solid	× 0.1	Storage	× 0.1

Kim et al. / Dose to radiation worker during 18 F-FDG synthesis

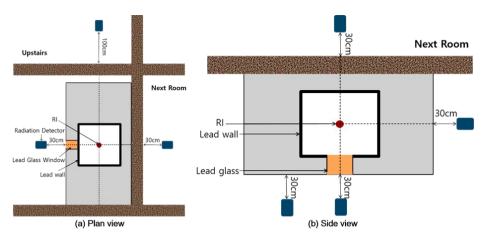


Figure 1. Dose measurement points on the hot cell surfaces: (a) plan view, and (b) side view.

RESULTS

Table 3 outlines the results of the external doses measured during 18F-FDG synthesis and dispensing activities as well as estimated effective doses. Table 4 summarizes the measured external doses during dispensing activities and corresponding effective doses. The table shows the average of 10 measurements taken at each measurement point. In the case of the Hospital B, the hot cell was located below ground level and the rear was filled with soil, no measurements were performed in that region. During synthesis, external doses at the window or front (from 0.26 μ Sv/h to 19.50 μ Sv/h) were generally higher than the others except for the Hospital E. For the Hospital E, the external dose at the rear $(7.74 \mu \text{Sv/h})$ was the highest. The external dose of the Hospital A showed the highest external dose of 19.50 µSv/h at the window. Similarly, during dispensing activities, external doses at the window or front (from 0.39 μSv/h to 14.40 μSv/h) were generally higher than the others except for the Hospital E. For the Hospital E, the external dose at the rear (7.23 uSv/h) was the highest. The external dose of the Hospital A showed the highest external dose of 14.40 μSv/h at the front. The external doses were found to be significantly higher in some hospitals especially for the Hospital A. In some hospitals, radiation exposure levels in excess of the dose limits for non-radiation personnel were measured in the rooms situated immediately over and next to the top, sides, and rear of the hot cell.

Table 5 outlines the results of the estimated internal dose during ¹⁸F-FDG synthesis and dispensing activities. The internal dose during ¹⁸F-FDG synthesis and dispensing activities was found to range between 0.047 and 0.208 mSv/y.

Table 3. Measured external doses and estimated effective doses during ¹⁸F-FDG synthesis.

Costs during F-FDG synthesis.					
Hospital	Evaluated	External dose	Effective dose		
-	point	(μSv/h)	(mSv/y)		
	Front	3.54	1.77		
	Window	19.50	9.75		
Α	Side	3.13	1.57		
	Rear	0.72	0.36		
	Тор	0.84	0.42		
	Front	13.93	6.97		
	Window	10.01	5.01		
В	Side	12.55	6.28		
	Rear	-	-		
	Тор	2.14	1.07		
	Front	0.26	0.13		
	Window	8.91	4.46		
С	Side	0.30	0.15		
	Rear	0.22	0.11		
	Тор	0.00	0.00		
	Front	2.31	1.16		
	Window	3.11	1.56		
D	Side	2.22	1.11		
	Rear	2.58	1.29		
	Тор	0.97	0.49		
	Front	6.19	3.10		
	Window	6.55	3.28		
E	Side	5.33	2.67		
	Rear	7.74	3.87		
	Тор	1.51	0.76		

Table 4. Measured external doses and estimated effective doses during dispensing activities.

Hospital	Evaluated point	External dose (μSv/h)	Effective dose (mSv/y)			
	Front	14.40	7.20			
	Window	12.30	6.15			
Α	Side	12.00	6.00			
	Rear	4.82	2.41			
	Тор	0.75	0.38			
	Front	13.45	6.73			
	Window	10.11	5.06			
В	Side	12.16	6.08			
	Rear	-	-			
	Тор	2.04	1.02			
	Front	0.39	0.20			
	Window	7.99	4.00			
С	Side	0.32	0.16			
	Rear	0.36	0.18			
	Тор	0.00	0.00			
	Front	2.43	1.22			
	Window	3.59	1.80			
D	Side	2.66	1.33			
	Rear	1.97	0.99			
	Тор	0.71	0.36			
	Front	6.05	3.03			
	Window	5.81	2.91			
E	Side	5.02	2.51			
	Rear	7.23	3.62			
	Тор	1.44	0.72			

DISCUSSION

The results of the present study demonstrated that the radiation workers are exposed to a significant amount of radiation during ¹⁸F-FDG synthesis and dispensing activities, and this is predominantly due to the external dose. The external doses measured in some hospitals were alarmingly high, and this may be due to two facts: 1) shielding defects due to manufacturing errors in the hot cell shielding design, i.e., deliberate or inadvertent design mistakes in the lead thickness and content; and synthesis and dispensing 2) the radiopharmaceuticals exceeding the limits of the shielding performance. hot cell recommended to set appropriate dose limits for radiopharmaceutical synthesis and dispensing activities in hot cells and to monitor the working

Table 5. Estimated internal doses.

Hospital	Indoor dispersion rate (Bq/ day)	Average atmospheric concentration (Bq/m³)	Annual intake (Bq)	Internal dose (mSv/y)
Α	494,000	2,470	1,358,500	0.126
В	814,000	4,070	2,238,500	0.208
С	185,000	925	508,750	0.047
D	296,000	1,480	814,000	0.076
E	370,000	1,850	1,017,500	0.095

hours of each radiation worker so that workers that have exceeded or are about to exceed the dose limit can be immediately shifted to non-radiation related tasks. At the same time, shifts of workers should be implemented to shorten the time individual workers are engaged in radiation related tasks. In addition, sufficient shielding should be provided for the lead glass window by increasing the design thickness, adjusting the size and position of the lead glass window, and using additional mobile lead glass shields of sufficient thickness. Work environments should be improved by installing real-time monitoring systems that emit a warning sound when a worker is at risk of exceeding the dose limit.

The long-term exposure of a human body to F -18, due to its relatively high energy (0.511 MeV), puts it at higher risk of experiencing the harmful effects of radiation exposure (6). The exposure during ¹⁸F-FDG synthesis can be reduced by allocating a group of radiation workers to perform the work in turns instead of allocating one radiation worker to conduct the entire operation. The expected annual effective dose in an extreme case of this study was up to 9.75 mSv under the assumption that one radiation worker works throughout the year, which corresponds to about the half of the annual average of 20 mSv of the 5-year dose limit set for a radiation worker (100 mSv) (4) and about 10-fold the dose limit set for non-radiation workers (1 mSv/y) (4). Even though the annual dose limits for radiation workers have not vet been exceeded. considering the repetitive long-term exposure during radiopharmaceutical synthesis dispensing processes to ensure continuous

production, the radiation workers involved in radiopharmaceutical production are at higher risk compared with those in other fields.

In some hospitals, radiation exposure levels in excess of the dose limits for non-radiation personnel were measured in the rooms situated immediately over and next to the top, sides, and rear of the hot cell ⁽⁴⁾. These rooms were used as equipment rooms, waste storage rooms, storerooms, etc. However, since potential harmful effects are only expected after a multi-hour stay in these rooms, personnel entering them for only a short time are not expected to be at any significant risk.

All activities involving radiation should be conducted in compliance with the as low as reasonably achievable (ALARA) principle (7-9). Adherence to this principle should be applied not only to the protection of radiation workers, but also to reducing the unnecessary exposure of non-radiation workers. To this end, it is recommended that measures must be taken to minimize the exposure of radiation worker during the synthesis and dispensing of all radiopharmaceuticals, including ¹⁸F-FDG. With the rapidly increasing use of radioisotopes in the treatment of various diseases (9), coupled with the demand increases in radiopharmaceuticals, the number of radiation engaged in radiopharmaceutical synthesis and dispensing activities for longer periods of time will increase, as will the number radiopharmaceutical manufacturers. ensure radiation medicine remains a valuable asset in combating disease and ill health, the first priority is to ensure the safety of radiation directly workers that are engaged radiopharmaceutical production. Therefore, when allocating radiation workers to conduct radiopharmaceutical synthesis and dispensing activities in hot cells, it is essential that additional customized radiation protection measures are adopted that have been optimized for each healthcare institution by taking into account a variety of factors, such as the daily

production, shielding performance, working hours, shift intervals, and real-time monitoring requirements.

ACKNOWLEDGEMENTS

This work was supported by the National Research Foundation of Korea (NRF) grant funded by the Korea government (MSIP) (No. 2015R1C1A1A01054192, No. 2017M2A2A7 A02020640, No. 2017M2A2A7A02020641, and No. 2017M2A2A7A02020643).

Conflicts of interest: Declared none.

REFERENCES

- Juweid ME and Cheson BD (2006) Positron-emission tomography and assessment of cancer therapy. N Engl J Med, 354 (5): 496–507.
- Chew J and Silverman DH (2013) FDG-PET in early AD diagnosis. Med Clin North Am, 97(3): 485–494.
- 3. Takada S, Muto T, Ito N, Kitahara A, Chisaka H, Kuze I, et al. (1983) An estimation for the dispersal rates of radioactive materials under various handling. Radioisotopes, **32(5)**: 260 –269.
- ICRP (2007) The 2007 Recommendations of the International Commission on Radiological Protection. ICRP Publication 103. Ann ICRP, 37(2-4).
- ICRP (1994) Dose Coefficients for Intakes of Radionuclides by Workers. ICRP Publication 68. Ann. ICRP 24(4).
- Jingu K, Kaneta T, Nemoto K, Ichinose A, Oikawa M, Takai Y, et al. (2006) The utility of 18F-fluorodeoxyglucose positron emission tomography for early diagnosis of radiation-induced myocardial damage. Int J Radiat Oncol Biol Phys, 66 (3): 845–51.
- ICRP (1973) Implications of Commission Recommendations that Doses be Kept as Low as Readily Achievable. ICRP Publication 22. Pergamon Press, Oxford.
- 8. ICRP (1977) Recommendations of the ICRP. ICRP Publication 26. Ann ICRP, 1(3).
- 9. ICRP (1991) The 1991 Recommendations of the International Commission on Radiological Protection. ICRP Publication 60. *Ann ICRP*, **21**: (1-3).